

# WORK-BENCH™ ASSEMBLY INSTRUCTIONS

## COMPONENTS: 2-Panel System





Panels: (2) 2'x3'

Legs: (4) 12"

(4) 24"


Internal Stackers: (4)




Step 1

## W3624 and WT3624


Available in Grid or Solid Top



Step 2




Step 3



Step 4

## COMPONENTS: 2-Panel System




Panels: (2) 2'x4'


Legs: (6) 12"

(6) 24"


Internal Stackers: (6)




Step 1



Step 2




Step 3

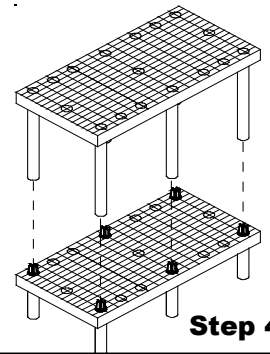

Step 4

## COMPONENTS: 2-Panel System




Panels: (2) 2'x5.5'


Legs: (6) 12"

(6) 24"


Internal Stackers: (6)




Step 1



Step 2



Step 3

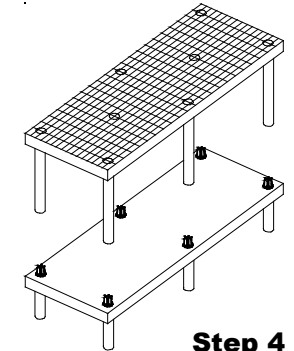

Step 4

## COMPONENTS: 2-Panel System




Panels: (2) 2'x8'


Legs: (8) 12"

(8) 24"


Internal Stackers: (8)




Step 1



Step 2



Step 3

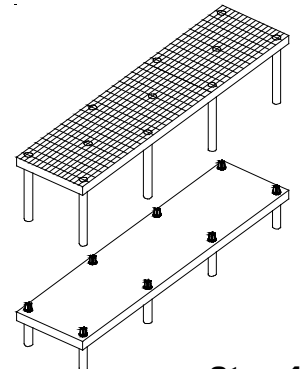

Step 4

### Step 1

Lay one of the work-bench panels up-side-down on the floor and insert either 12" or 24" posts into sockets as shown. Return to upright position.

### Step 2

Insert **Leg Stackers** over the outside sockets of the previously completed panel as shown.

### Step 3

Invert the next level work bench panel and insert the remaining posts into the sockets as shown.

### Step 4

Return the second work bench panel to the upright position. Align posts over the leg stackers and push all the way down until the leg stackers are inserted into the posts.

# WORK-BENCH™ ASSEMBLY INSTRUCTIONS

## W3636 and WT3636



Available in Grid or Solid Top

### COMPONENTS: 2-Panel System




Panels: (2) 3'x3'  
Legs: (4) 12"  
(4) 24"


Internal Stackers: (4)




Step 1



Step 2




Step 3

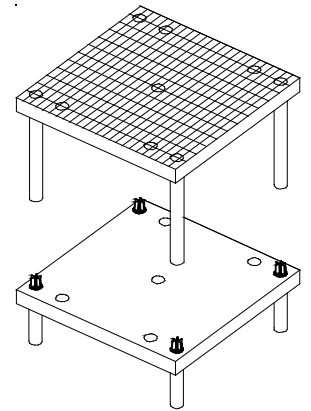

Step 4


## W6636 and WT6636

### COMPONENTS: 2-Panel System




Panels: (2) 3'x5.5'  
Legs: (6) 12"  
(6) 24"


Internal Stackers: (6)




Step 1



Step 2




Step 3



Step 4


## W9636 and WT9636

### COMPONENTS: 2-Panel System




Panels: (2) 3'x8'  
Legs: (8) 12"  
(8) 24"


Internal Stackers: (8)




Step 1



Step 2



Step 3

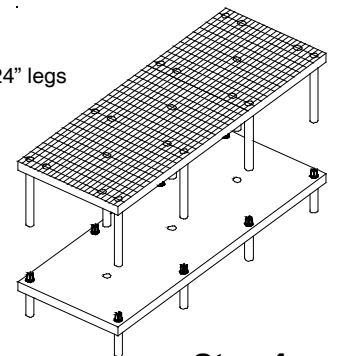

Step 4

### Step 1

Lay one of the work-bench panels up-side-down on the floor and insert either 12" or 24" posts into sockets as shown. Return to upright position.

### Step 2

Insert **Leg Stackers** over the outside sockets of the previously completed panel as shown.

### Step 3


Invert the next level work bench panel and insert the remaining posts into the sockets as shown.

### Step 4

Return the second work bench panel to the upright position. Align posts over the leg stackers and push all the way down until the leg stackers are inserted into the posts.

# ASSEMBLY INSTRUCTIONS

## 2- Options to Secure Legs to Panels




### Leg Collar


### How to use the Leg Collar

First, place the collar over socket aligning teeth of collar to fit through grids.


Second, Leg is inserted into the leg collar.



### Collar Placement



### Leg Placement on Collar




### Internal Leg Stacker


### How to use the Internal Leg Stacker

First, Place the stacker over socket aligning the prongs with the D-shaped holes, and push down.

Second, leg is inserted over the leg stacker.

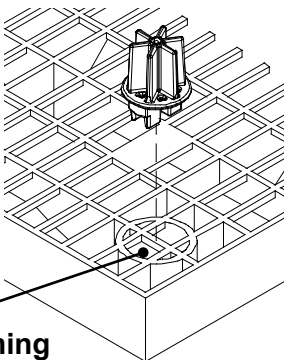

### Internal Leg Stacker Placement

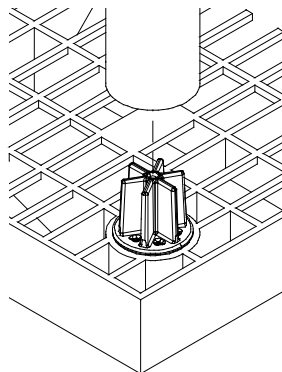

### Leg Placement on Internal Leg Stacker